


# HIGH PRESSURE HOSE 2500 BAR

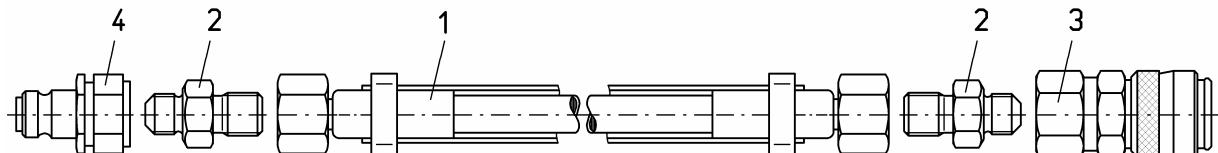

Pos.	Name	Article number
1	High Pressure hose	2-00578-_____
2	Adaptor G1/4" AG 120° / G1/4" AG 60°	1-00040-0016
3	Fast-Lock coupling socket CVK25-2 G1/4" IG	1-00200-0001
4	Fast-Lock coupling nipple CVN25-2 G1/4" IG	1-00200-0002

## ORDER DENOMINATION:

„High Pressure hose, .. m length, with Fast-Lock coupling socket and - nipple C25,  
**Art.-Nr. 1-00201-XXXX**“ The last 4 digits define the length, e.g. 3m: 1-00201-0003.

## LENGTHS ON STOCK FOR POS.1

0,5m; 1m; 2m; 3m; 4m; 5m; 6 m (Pos.01) All other lengths can be delivered upon request.

## DELIVERY STATE:

Completely assembled, bleded and filled with oil.

*Standard filling is hydraulic oil ISO VG 15. Other liquids are available upon request.*

All hoses are equipped with a protection hose. The data printed on the high pressure hose, i.e.: „EN/A578/5/XQJJ/PN3000“ are exclusively related to the high pressure hose pos 1.

The minimal bending radius of the high pressure hose is 175 mm.

**CAUTION: The Fast-Lock coupling nipple Pos. 4 must not be pressurised while unconnected !**

## TECHNICAL DATA:

High pressure hose pos. 01

max. operating pressure: 3.000 bar

Test pressure: 4.650 bar

min. burst pressure: 6.200 bar

Inner diameter: 5,0 mm

Major diameter: 10,9 mm

Hose core: POM

Pressure bearers: 6 coiling shifts of corrosion proof spring steel wire

Top layer: PA, Nylon 11/12

Protection hose: PVC


Weight: 0,45 kg/m

Fast-Lock coupling socket and

- nipple C25-2 Pos. 03 + 04:

max. operating pressure: 2.500 bar

min. burst pressure: 5.000 bar



FASTECH AG

INDUSTRIEZONE

FON +41 41 875 78 30

SCHÄCHENWALD

FAX +41 41 875 78 31

CH-6460 ALTDORF

INFO@FASTECH.CH

SWITZERLAND

WWW.FASTEC.CH